

ALBANY TOGGLE SWITCH

Our traditionally styled switches are designed to fit standard recessed wall boxes.


The single and double switches mount onto a standard single wall box.

The triple and quadruple switches mount onto a standard double wall box.


If you are in any doubt how to proceed, consult a qualified electrician.

- 1 Isolate electricity supply and remove appropriate fuse before removing existing fittings.
- 2 If replacing existing fitting, record the existing wiring connections prior to disconnection and verify no main voltage is present at switch terminals using a neon tester or meter.
- 3 Ensure no more than 10mm of bare wire shows beyond its insulation and connect as follows:


ONE WAY SWITCHING



TWO WAY SWITCHING



INTERMEDIATE SWITCHING

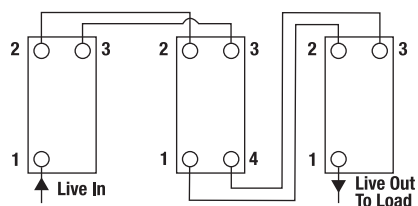

- 4 Screw wooden patress to the recessed wall box, making sure any slack wire is fed into the void in the box to avoid becoming trapped.

To aid wiring, the switch can be removed from the wooden patress using the plastic key provided with the fixing ring.